



كhalid سaad
KHALID SAAD
Building trust for future

CATALOGUE

OUR TOP BRANDS



GYP SUM BOARD

Gypsum board, also known as **Drywall**, **Plasterboard**, or **Wallboard**, is used to form panels made of gypsum plaster pressed between two thick sheets of paper. Gypsum board is used as partitions and linings of walls, ceilings, roofs, and floors. Advantages of gypsum board include its low cost, ease of installation and finishing, nontoxicity, sound attenuation, and availability.

Brands:



Produced in compliance to American ASTM Standards & European EN-520 standards **Approved by:**



المفئة السعودية للمواصفات والمقاييس والجودة
Saudi Standards, Metrology and Quality Org.



Regular Gypsum Board



Fire Resistant Gypsum Board



Moisture Resistant Gypsum Board



Fire and Moisture Resistant Gypsum Board

Available Sizes:

2.4m x 1.2m x 12.5mm

3m x 1.2m x 12.5mm

Length:

We can customize any desired length up to (4m)

Thickness:

We can customize special thicknesses like (9.5/15/16/18/19mm)

CEMENT BOARD

Cement Board is a cement backer board designed to use with walls, floors, and countertops. Used on walls in moisture-prone areas, as a tile backer board, and as an underlayment for all tile, vinyl, and wood flooring applications.

Brands:



Available Sizes:


2400 x 1200 x 6 mm

2400 x 1200 x 9 mm

2400 x 1200 x 12 mm

2400 x 1200 x 18 mm

STEEL PROFILES




Furring Channel




Main Channel



Perimeter Angle



Stud



Runner

ACCESS PANEL



Available Sizes:

30 x 30 cm
40 x 40 cm
45 x 45 cm
50 x 50 cm
60 x 60 cm
60 x 80 cm
60 x 120 cm

GYPSUM POWDER



Gypsum Powder

Available Sizes:
40 KG



Gypsum French Molding Plaster

Available Sizes:
25 KG

JOINT COMPOUND



Ready Mixed Joint Compound

Available Sizes:
28 KG

ACCESSORIES



Drywall Screws

Size in Inches:
1" / 1.25" / 1.5" / 2" / 3" / 4"
Bugle Head, Fine Thread
Sharp Point.



Self Drilling Screws

Size in Inches:
0.5" / 1" / 1.25" / 1.5"
Washer Head, Fine Thread
Self Drill Point, Zinc
Plated.



Steel Nails

Size in Inches: 1"



Don Quichotte Concrete Nails

Available Sizes:
2 x 20 mm
2 x 25 mm
2.5 x 25 mm



Safety Nails Anchors

Available Sizes:
M6 x 40



Sleeve Anchors

Available Sizes:
M8 x 40



Raw L Bolt

Available Sizes:
M6 x 50



Drop-in Anchors

Used with concrete, natural stone, and solid brick.

Available Sizes:
M4 M5 M6 M8 M10 M12
6mm 8mm 10mm 12mm
Metric anchors Drop-in anchors.



Hex Nut

Available Sizes:
Thickness range from 6 to 10 mm.



Wire Connecting Clips

Used to fasten the Furring Channels to the primary Channels of 38 mm width in the Drywall ceiling applications.



Adjustable Butterfly Clips

Used to hang the suspension systems for the exposed ceiling grid and the concealed suspension.



Rod Hangers

Used to hang the suspension systems for the exposed ceiling grid and the concealed suspension.
Thickness range from 2.6 to 3.8 mm with Zinc coating 180 g/m².




Threaded Rod Hangers

Used to hang the suspension in high tension due to being relatively long rods and being threaded.
6 mm thick with Zinc coating 180 g/m².



Deflection Clips

Used in place or in combination with deflection Track and allowing for vertical movement above drywall partitions.



Drywall Fixing Bracket

Used in drywall assemblies allowing for supporting a vertical load or providing lateral bracing CRC connections and floor joist hangers.

TAPES



U-Channel Bracket (BD2)

To aid the installation of plasterboard linings on masonry walls, timber joists and the encasement of steel columns and beams.



Primary Channel Hanging Bracket

Suspended by wire hanger used to fix the primary channel into the Adjustable Wire Connecting Clip. The bracket is used as any alternative option for the Primary Channel C Bracket with threaded rod suspension system in ceiling assemblies.



Joint Tape

Available Sizes:
50mm x 90m
Self Adhesive Fiber Mesh Joint Tape



Corner Tape

Available Sizes:
Metal Corner Easy Tape




Paper Tape

Available Sizes:
50mm x 75m Roll
Drywall Paper Joint Tape

CEILING TILES

Ceiling tiles, also known as ceiling panels, are lightweight construction materials used to cover ceilings. Placed in suspension grid, they provide some thermal insulation but are usually designed to improve the aesthetics and acoustics of a room. They are commonly used in commercial, residential, and industrial applications, useful in retail stores, offices, hotels, hospitals, educational institutions, and other such applications. Ceiling tiles are mostly made from mineral fiber, but other materials are available, such as gypsum ceiling tiles and metal ceiling tiles. We have a quite diverse range of variations that will undoubtedly meet your needs. We provide a variety of colors, designs, and perforations. We also have decorative tiles and edge trim (angles) in various sizes. On request, special sizes and custom lengths are available.

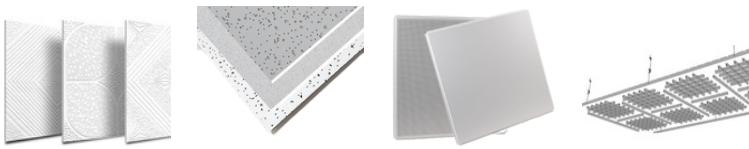

Gypsum Ceiling Tiles

Available Panel Sizes:
595 x 595 mm
603 x 603 mm

Thickness:
we can customize special thicknesses like (8/9.5/12.5mm).

Mineral Fiber Tiles

Available Panel Sizes:
600 x 600 mm
600 x 1200 mm

Thickness:
we can customize special thicknesses like (12.5/15/19mm).

Metal Ceiling Tiles

Available Panel Sizes:
600 x 600 mm

Thickness:
0.50mm and 0.6mm


Open Cell Ceiling

Available Sizes:
we can customize special sizes in various dimensions.

Thickness:
0.6mm

CEILING GRID SYSTEM

BRANDS:  



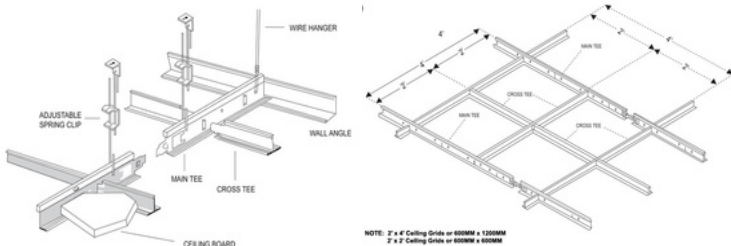


INSULATION

Some of the most common areas to insulate include lifts, cavity walls, external walls, and floors. We can customize special thicknesses, any desired length, any desired density, and with or without facing insulation like aluminum foil (FSK/FRK/O-Class/Perforated), BFG (Black/White), WOBFG, kraft paper, bitumen paper, GI/SS wire mesh, and metalized aluminum Foil.



THERMAL INSULATION



Available Sizes:

Board Sizes:
600mm x 1250 mm
600mm x 2500 mm
Board Thickness:
30 - 100 mm

Panels

Available Sizes:
Size: 600 x 1200
Thickness: 25 - 150 mm
Density: 35 - 200 kg/ m3
Facing: None/BFG/FSK

Mattress

Available Sizes:
Size: 1200 x 4000 mm
Thickness: 25 - 200 mm
Density: 70 - 150 kg/ m3
Facing: G.I & S.S Wire Mesh

Blanket

Available Sizes:
Size: 1200 x 5000 - 10000mm
Thickness: 25 - 100 mm
Density: 35 - 70 kg/ m3
Facing: None/BFG/FSK

Pipe Section

Available Sizes:
Size: 1/2" - 24" x1.2 m Length
Thickness: 25 - 150 mm
Density: 100 - 150 kg/ m3
Facing: None/FSK

COUNTER TOPS



Dupont Corian Solid Surface

BLINDS



Aluminium Blinds


FLOORING



Vinyl



Raised



Carpet Tiles

STEEL DOORS



Steel Doors

The fire doors with corner frames are suitable for any wall thickness as a standard.

FORMICA PHENOLIC SHEETS



Toilet Cubicles

We can customize any desired type and sizes per customer request.



Cabinet

For labs and toilets, we can customize any desired type and sizes per customer request.



Lockers

We can customize any desired type and sizes per customer request.

Give us a call today!

Kingdom Of Saudi Arabia

Dammam

Khodariyah, Omer Bin AbdulAzeez Street.
Tel: +966 138373478
e-mail: salesdammam@khalidsaad.com
salesalhassa@khalidsaad.com

Riyadh

Exit 21, AlHair Road.
Tel: +966 582571343
+966 566436880
e-mail: salesriyadh@khalidsaad.com

Khamis Mushait

80th Street, New Industrial Area.
Tel: +966 581350661
e-mail: saleskhamis@khalidsaad.com

Al Ahsa

Mubarratz
Tel: +966 135833496

Al Koot

Tel: +966 135855719
Salehiya
Tel: +966 135815902

Fax: +966 135833495
e-mail: salesalhassa@khalidsaad.com

Kingdom of Bahrain

Road 3019, Building 1046, Office 35, Manama 330.
Tel: +973 17001360
Fax: +973 17005340
e-mail: salesbahrain@khalidsaad.com
P.O.Box: 65189



SCAN TO FIND OUT MORE
www.khalidsaad.com
www.kastaplus.com
info@khalidsaad.com

 [khalidsaadtrading](https://www.instagram.com/khalidsaadtrading)

 [khalidsaadtrading](https://www.facebook.com/khalidsaadtrading)

 [khalidsaadtrade](https://twitter.com/khalidsaadtrade)